

1

PLACE THE REMOTE CONTROL TO BE CLONED PERPENDICULARLY, IN THE LOWER LEFT SIDE OF THE AIR4



2

PRESS **BUTTON 1** ON THE AIR4 REMOTE CONTROL



3

AT THE SAME TIME PRESS **BUTTON 4** FOUR TIMES

4

RELEASE BOTH BUTTONS





5

AIR4 REMOTE CONTROL LED WILL START FLASHING BRIEFLY ABOUT EVERY 2 SEC.

6

PRESS AND HOLD DOWN THE BUTTON TO BE COPIED FROM THE ORIGINAL REMOTE CONTROL AND WAIT FOR THE AIR4 LED TO START FLASHING RAPIDLY, WHICH CONFIRMS ACQUISITION OF THE CODE. RELEASE THE BUTTON

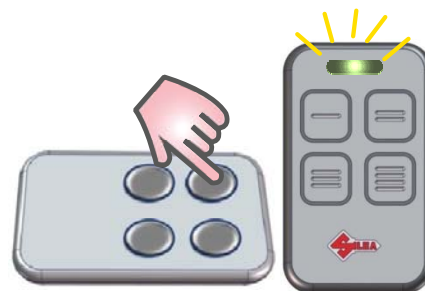

7


PRESS THE AIR4 REMOTE CONTROL BUTTON TO BE MEMORIZED. WAIT FOR THE LED TO GO OUT



AFTER HAVING SELECTED THE **ANTENNA TUNING FUNCTION** IN EASY SCAN

8

OPEN THE REMOTE CONTROLS SHELL

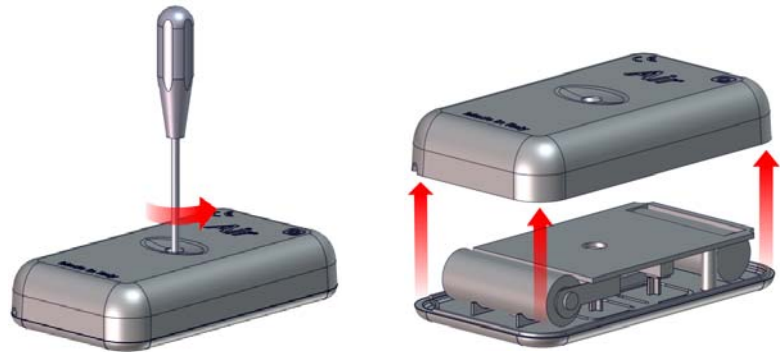

9

BRING THE QUARTZ REMOTE CONTROL TO THE EASY SCAN READING AREA . PRESS AND HOLD A BUTTON ON THE REMOTE CONTROL. WITH A CERAMIC SCREWDRIVER SLOWLY TURN THE ANTENNA'S ADJUSTING SCREW TO OBTAIN THE MAXIMUM AMPLITUDE OF INTENSITY INDICATED ON THE EASY SCAN DISPLAY



10

ONCE YOU REACH THE MAXIMUM VALUE, MOVE THE REMOTE CONTROL SLIGHTLY AWAY FROM THE EASY SCAN DEVICE AND REPEAT THE PROCESS UNTIL YOU REACH THE MAXIMUM AMPLITUDE OF INTENSITY INDICATED ON THE EASY SCAN DISPLAY



11

CLOSE THE REMOTE CONTROLS SHELLS.

